


Technical drawing
Balancer
TYPE 7228

Load range: 0.4 - 6.5 kg
Cable travel: 1.6 m

Further information

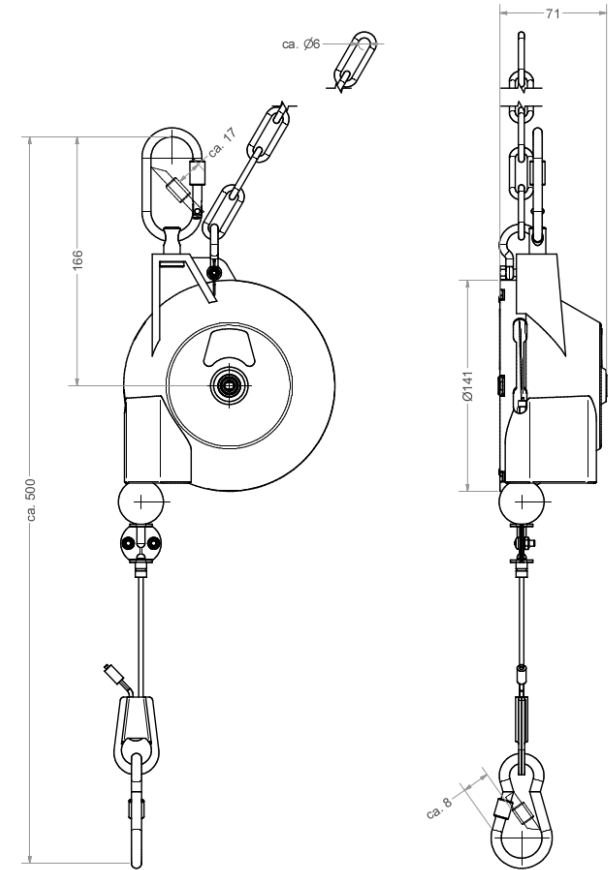



Technical drawing

Balancer

TYPE 7230 / 7231

Load range: 3 – 21 kg
Cable travel: 2 m

Further information

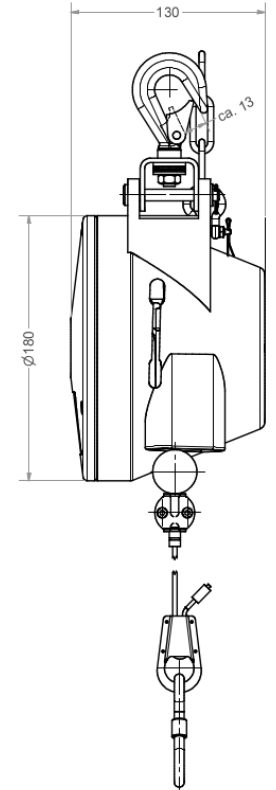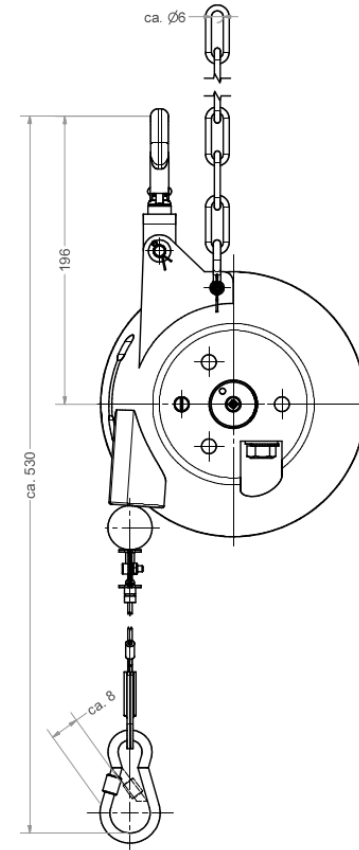


Technical drawing

Balancer

TYPE 7235 / 7236

Load range: 15 – 55 kg
Cable travel: 2 m



Further information

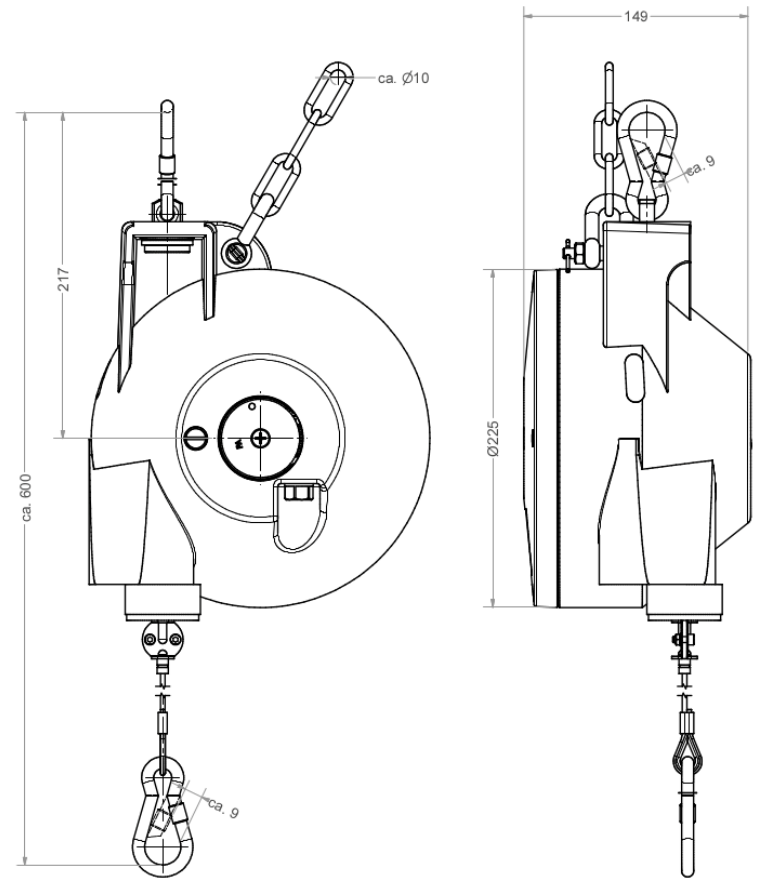

Technical drawing
Balancer
TYPE 7241*

Load range: 12 – 100 kg
Cable travel: 2 m

Further information

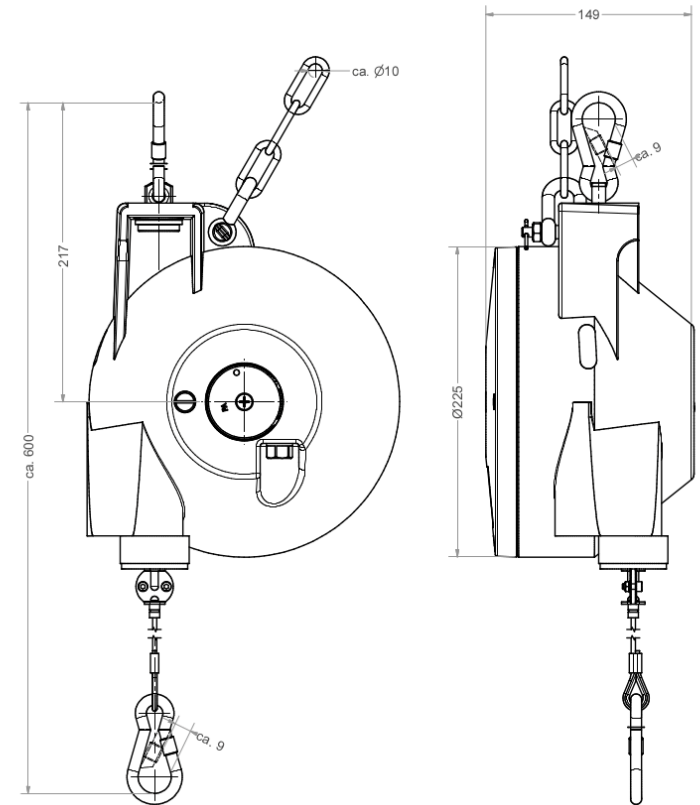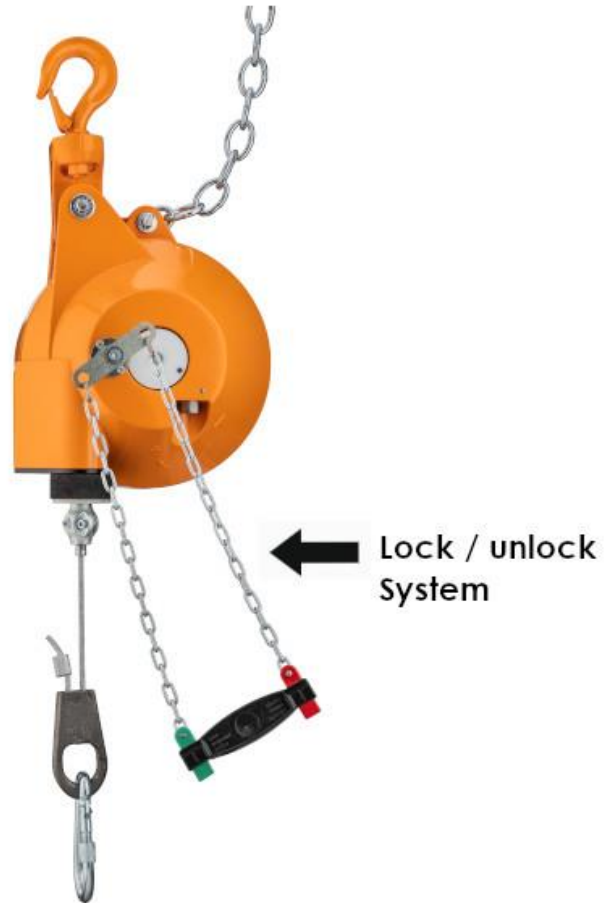


* Available with or without drum lock system

Technical drawing

Balancer TYPE 7245

Load range: 55 – 125 kg
Cable travel: 1.8 m


Further information

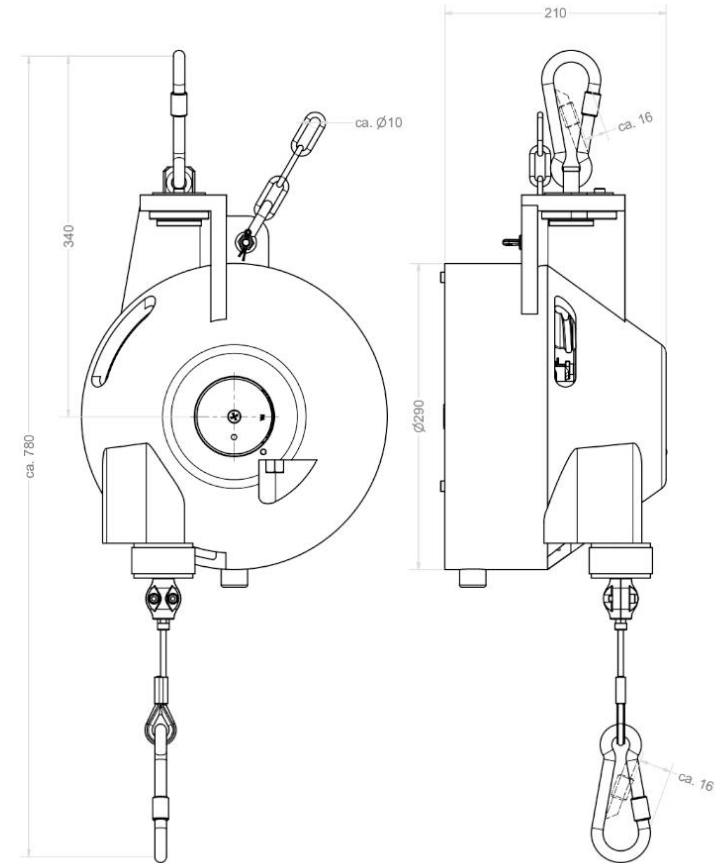

Technical drawing
Balancer
TYPE 7248

Load range: 12 - 100 kg
Cable travel: 2 m


Further information

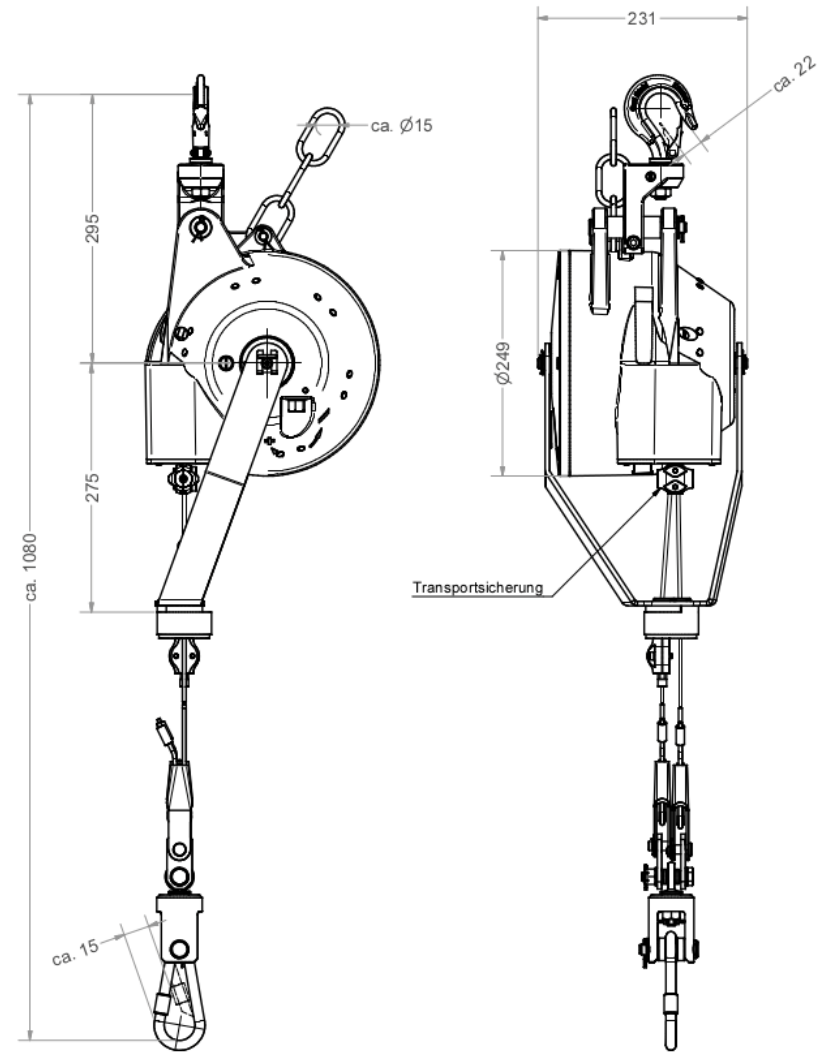

Technical drawing
Balancer
TYPE 7251

Load range: 15 – 200 kg
Cable travel: 3 m

Further information

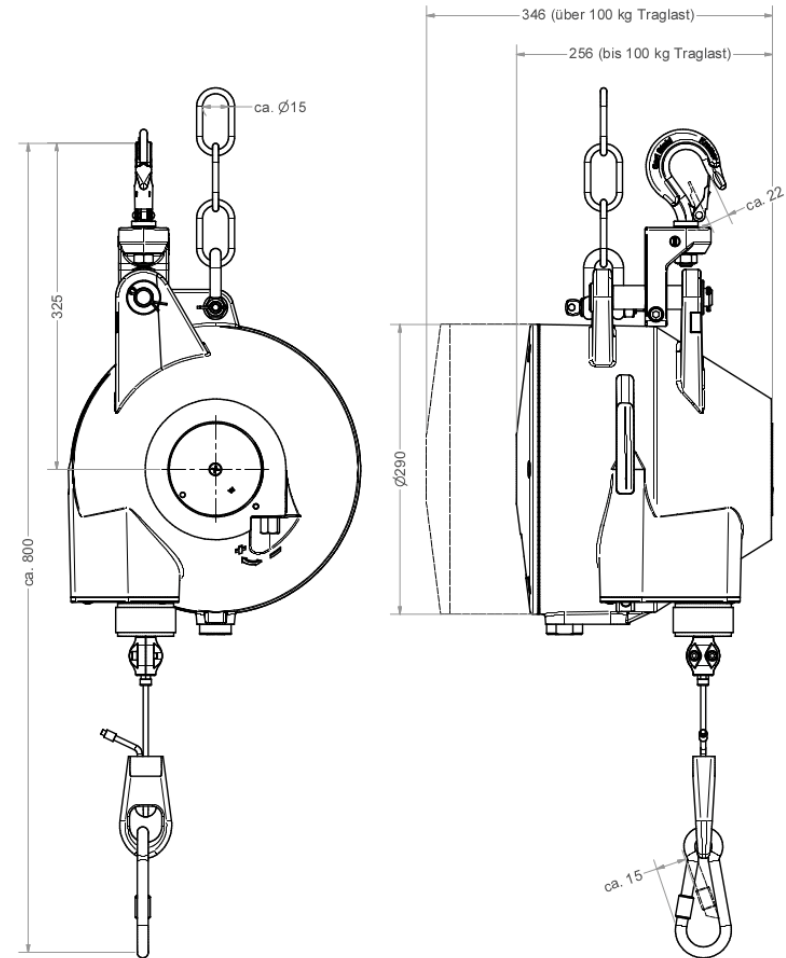

Technical drawing
Balancer
TYPE 7261

Load range: 150 - 300 kg
Cable travel: 1.5 m

Further information

